

Green Light Laser Pointer


Emitting at the 532 nm green spectrum the laser beam of these pointers are better visible by a faktor of 5 as compared to the traditional red beam pointers with the same output power. Our DPSS Laser Pointers are available as certified systems in Class II with an output power below 1 mWatt and as Class IIIa between 1 - 5.

On request, we also provide units that exhibit a keyswitch at the rear for protection from unauthorized usage. Our pen-like pointers are available in black, sea blue and silver gray with or without gold trim.


Laser	GLP-1-1	GLP-1-3	GLP-1-5	GLP-2-1	GLP-2-5	JLP-1	JLP-5
Wavelength	532 nm						
Output power	1 mW	1-3 mW	3-5 mW	< 1 mW	5 mW	< 1 mW	5 mW
Operating mode	CW						
Divergence	< 1,5 mRad					< 1,2 mRad	
Laser class	IIIa			Ia	IIIa	Ia	IIIa
Beam diameter	1 mm						
On switch	Push button						
Key switch Option	No			Yes		No	
Power supply	2 x AAA/ 1.5V Batteries			2 x N/ 1.5V Lithium Batt.		2 x N-Type	2 x AAA/ 1.5V
Dimensions (mm)	13 Ø x 150.5			13.5 Ø x 155		13.5 Ø x 127	13.5 Ø x 148
Housing color	black, blue, silver					silver, blue	
Weight (excl. Batteries)	60 gr.			60 (70) gr.		50 gr.	70 gr.
Presentationbox Option	Genuine wood					Plastic velvet inlayed	

Batteries are included in the delivery, a soft inlayed box for presentation or a wooden case as stylish corporate gift can be provided. For quantities of more than 100 units ea. we offer a special pricing. Please consult with us.


GLP-1

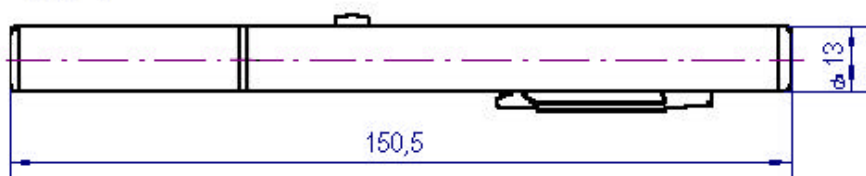

GLP-2

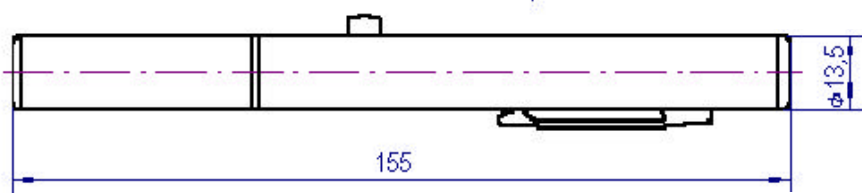

JLP-1

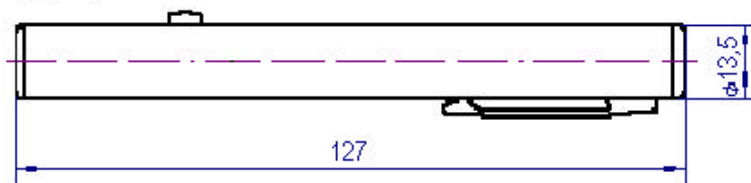

JLP-5

